

BATCH AND CULLET  
TREATMENT SYSTEMS  
FOR THE GLASS INDUSTRY

**EME**  
Member of **SORG** Group



## DOUBLE ROLL CRUSHER TYPE ZWB / ZWB-S

### EME GmbH


Wockerather Weg 45  
41812 Erkelenz  
[www.eme.de](http://www.eme.de)

Telefon: +49 2431 9618 0  
Fax: +49 2431 74687  
[contact@eme.de](mailto:contact@eme.de)

Stoltestraße 23  
97816 Lohr am Main  
[www.eme.de](http://www.eme.de)

Telefon: +49 9352 507 500  
Fax: +49 9352 507 193  
[contact@eme.de](mailto:contact@eme.de)

BATCH AND CULLET  
TREATMENT SYSTEMS  
FOR THE GLASS INDUSTRY

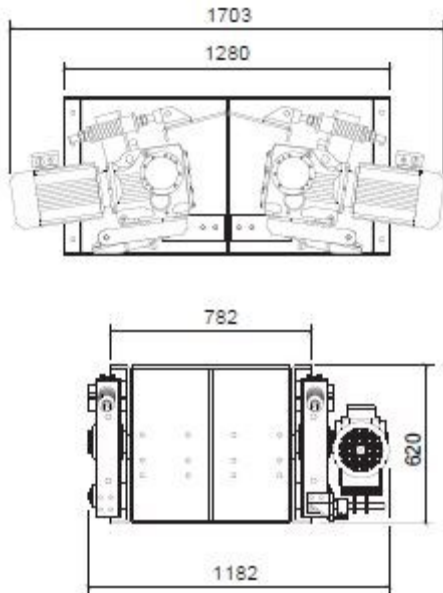

Einlauf: 600 x 400 mm  
 Auslauf: 600 x 730 mm  
 Spaltbreite Walzen: 5 – 15 mm

**Double roll crusher ZWB / ZWB-S**

The double roll crusher is predominately used for crushing of pre-crushed glass.

The crushing rollers of the ZWB version are provided with a special hard surface welding. The crushing rollers of the version ZWB-S are equipped with high wear-resistant, chill cast-iron spiked shells.

The slow-speed crushing roller design typically results in low noise and dust emissions. The final grain size can be adjusted by changing the crushing roller gap. The crusher is characterized by its compact design

**TECHNICAL DATA**

Throughput capacity	Bulk goods weight	Motor-output	Weight	
			ZWB	ZWB-S
appr. 7 t/h	0,4 t/m <sup>3</sup>	2 x 4 kW	1380 kg	1550 kg
appr. 16 t/h	0,9 t/m <sup>3</sup>			
appr. 19 t/h	1,1 t/m <sup>3</sup>			
appr. 24 t/h	1,4 t/m <sup>3</sup>			

**OVERVIEW OF CHARACTERISTICS:**

- **Crushing of Pre-Crushed Glass**
- **Low Space requirement**
- **Low Noise and Dust Emissionen**
- **Maintenance Friendly Design**
- **Easy Installation**

