



## SECONDARY CRUSHER


### EME GmbH

Wockerather Weg 45  
41812 Erkelenz  
[www.eme.de](http://www.eme.de)

Telefon: +49 2431 9618 0  
Fax: +49 2431 961850  
[contact@eme.de](mailto:contact@eme.de)

Stoltestraße 23  
97816 Lohr am Main  
[www.eme.de](http://www.eme.de)

Telefon: +49 9352 507 500  
Fax: +49 9352 507 193  
[contact@eme.de](mailto:contact@eme.de)

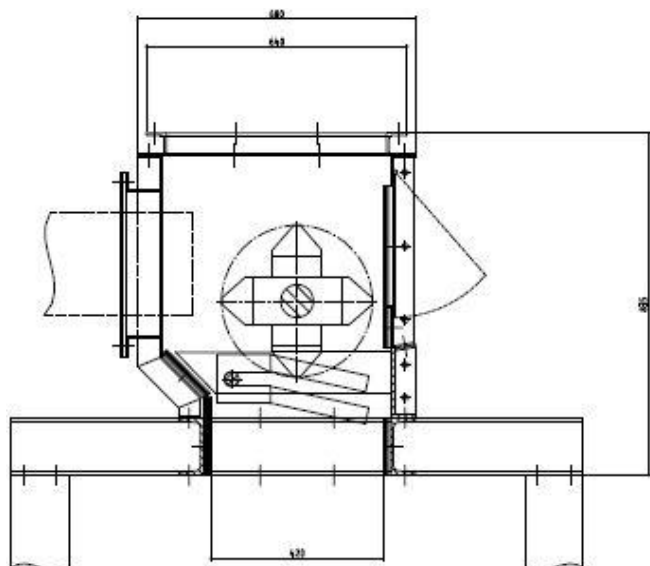

### Secondary Crusher for Flat Glass

The secondary crusher is mainly used for secondary crushing of glass edges. In addition, it is also used as a primary edge crusher. For this purpose, the edge cuts are conveyed laterally to the crusher by means of several vibratory chutes arranged in a cascade-like manner. The impact heads are manufactured of special chill casting and contain only traces of nickel.

Vertical charging is also possible.

For container glass crushing, the crusher can also be used as primary crusher.

### OVERVIEW OF CHARACTERISTICS:

- Use as Edge Crusher or Secondary Crusher for Flat Glass
- Primary Crusher for Container Glass
- Compact Construction
- Low Space Requirement
- Low Cost Alternative to the Edge Crusher

### TECHNICAL DATA – SECONDARY CRUSHER

<u>Inner width:</u>	<u>880 mm</u>
<u>Glass thickness:</u>	<u>1 – 20 mm</u>
<u>Driving capacity:</u>	<u>up to 7,5 kW</u>
<u>Output:</u>	<u>max. 30 t/h</u>
<u>Glass width after crushing:</u>	<u>appr. 50 mm</u>
<u>Rotor type:</u>	<u>impact head</u>