



## CPO / CPS PUSHER CHARGER

### EME GmbH


Wockerather Weg 45  
41812 Erkelenz  
[www.eme.de](http://www.eme.de)

Telefon: +49 2431 9618 0  
Fax: +49 2431 961850  
[contact@eme.de](mailto:contact@eme.de)

Stoltestraße 23  
97816 Lohr am Main  
[www.eme.de](http://www.eme.de)

Telefon: +49 9352 507 500  
Fax: +49 9352 507 193  
[contact@eme.de](mailto:contact@eme.de)

# BATCH AND CULLET TREATMENT SYSTEMS FOR THE GLASS INDUSTRY

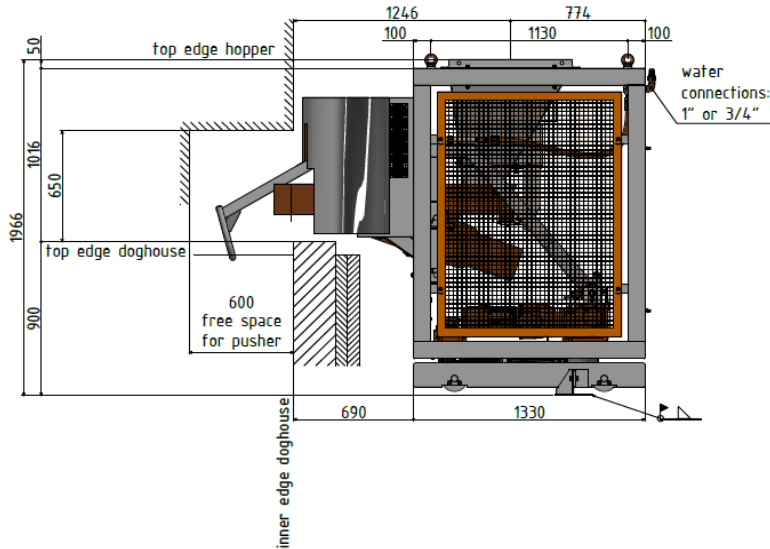

## CPO/CPS Oscillating and Stationary Pusher Charger

These widely used chargers discharge the batch from the furnace silo, via a vibratory conveyor trough, into the furnace.

The Pusher divides the batch flow and pushes the piles into the melting area. The frequency of the pusher is variable and thus adjustable.

In the stationary version, the pusher movement is always in one direction only. The oscillating version allows a swivel range of 40° with an adjustable frequency.

The batch can be spread over a larger area and thus provides a good distribution of nace.

### TECHNICAL DATA:

Type	Recommended furnace capacity*	Vibratory Conveyor	Pusher drive	Rotary actuators	swivel angle
CPS-400 D	up to 160 t/d	0,3 kW	1,1 kW	0,25 kW	20 °
CPS-500 D	up to 250 t/d				
CPO-400 D	up to 160 t/d	0,7 kW	1,1 kW	0,25 kW	20 °
CPO-500 D	up to 250 t/d				
CPO-650 D	up to 350 t/d				
CPO-800 D	up to 500 t/d	1,0 kW			

Cooling water consumption: 8-12 l/min      Cooling water temperature: 20 °C – 60°C

\* batch density of 1,3 kg/dm<sup>3</sup> and melting loss of von 18%. Cullet ratio of 30 %.

### ADVANTAGES AT A GLANCE :

- **Separated Charge and Push functions**
- **Long-life span**
- **Possibility to influence the batch distribution**
- **Optimize the energy input into the Furnace**
- **Low Cooling Water Consumption**
- **Robust Design**
- **Easy Maintenance**